


## CELL CHARACTERISTICS

Capacity	Nominal	2,500 mAh 9.0 Wh
Cell Voltage	Nominal Charge Discharge	3.6 V 4.2 V 2.5 V
Continuous Charge Current	Standard Maximum	1.25 A 6.0 A
Charge Time	Standard Fast Charge	180 min 45 min
Continuous Discharge Current	Maximum	30 A (with 80°C cut off)
Internal Resistance	AC (1 KHz)	≤20 mΩ
Operating Temperature	Charge Discharge	0°C to 50°C -20°C to 80°C
Energy Density	Volumetric Gravimetric	544 Wh/L 191 Wh/kg

## PHYSICAL CHARACTERISTICS

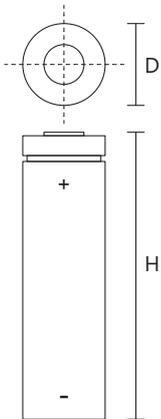


Shape	Cylindrical
Can	Steel
Diameter	18.6 mm (Max)
Height	65.3 mm (Max)
Weight	47 g (Max)


**⊖** The information shown on this document is for descriptive purpose only. This document is not intended to make or imply any performance guarantee or a product warranty.

All specifications and characteristics shown herein are for REFERENCE ONLY, please check the latest version of the product specification for guidance. All specifications and characteristics shown herein are subject to change without prior notice and should be verified with a Tenpower representative or the nearest Tenpower recognized agent before placing an order.


## DISCHARGE RATE CHARACTERISTICS

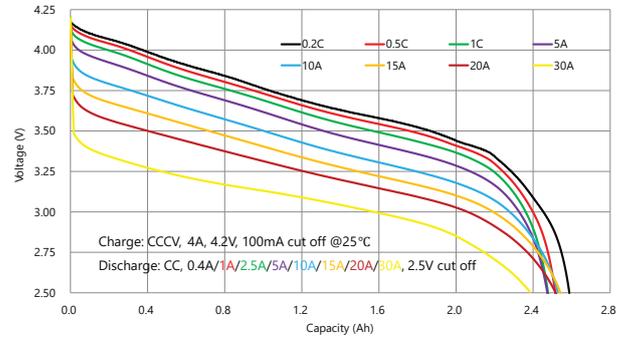

## DISCHARGE TEMPERATURE CHARACTERISTICS

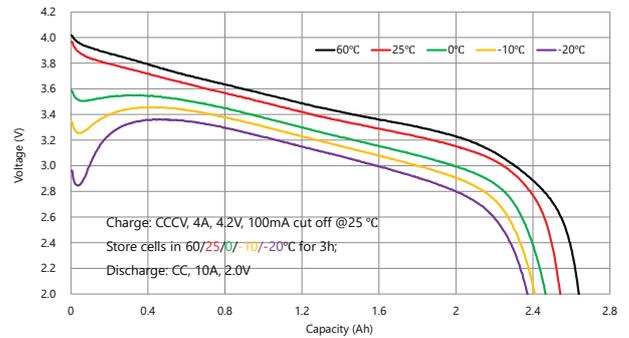

## CYCLE LIFE CHARACTERISTICS

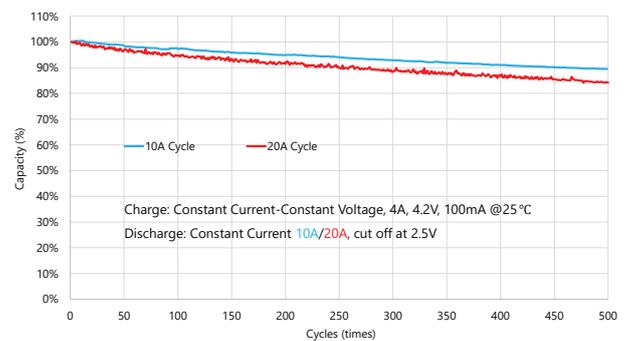

## STORAGE CHARACTERISTICS

