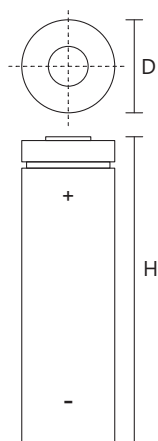


> CELL CHARACTERISTICS

Capacity	Nominal	4,000 mAh 14.4 Wh
Cell Voltage	Nominal Charge Discharge	3.6 V 4.2 V 2.5 V
Continuous Charge Current	Standard Maximum	2.0 A 6.0 A
Charge Time	Standard Fast Charge	180 min 60 min
Continuous Discharge Current	Maximum	35 A
Internal Resistance	AC (1 KHz)	≤10 mΩ
Operating Temperature	Charge Discharge	0°C to 50°C -20°C to 80°C
Energy Density	Volumetric Gravimetric	594 Wh/L 206 Wh/kg

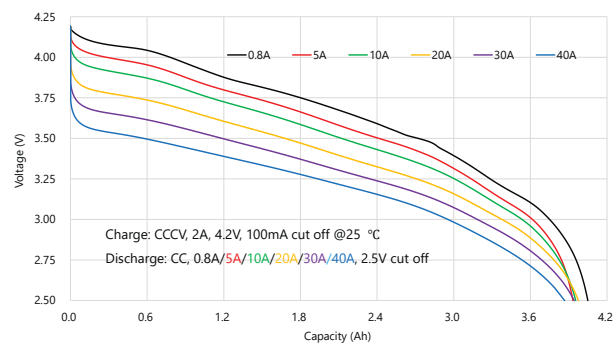
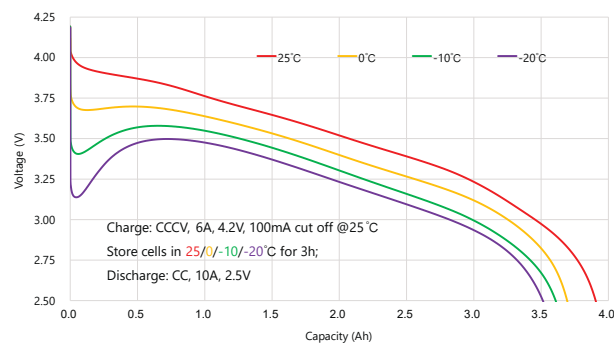
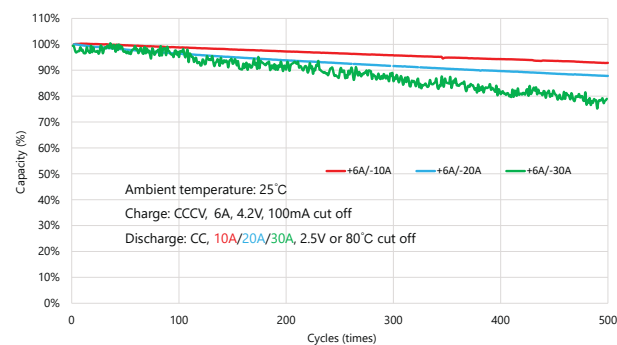
> PHYSICAL CHARACTERISTICS

Shape	Cylindrical
Can	Steel
Diameter	21.3 mm (Max)
Height	70.3 mm (Max)
Weight	70 g (Max)



The information shown on this document is for descriptive purpose only. This document is not intended to make or imply any performance guarantee or a product warranty.

All specifications and characteristics shown herein are for REFERENCE ONLY, please check the latest version of the product specification for guidance. All specifications and characteristics shown herein are subject to change without prior notice and should be verified with a Tenpower representative or the nearest Tenpower recognized agent before placing an order.

> DISCHARGE RATE CHARACTERISTICS**> DISCHARGE TEMPERATURE CHARACTERISTICS****> CYCLE LIFE CHARACTERISTICS****> STORAGE CHARACTERISTICS**